

SUBJECT: Air Line & O-Ring Removal **PART:** HiJacker Air Shocks

05012021

PROBLEM DESCRIPTION:

Installer unable to remove the ferrule and o-rings from HiJacker air shocks.

SOLUTION:

Remove the ferrule and o-rings:


TOOLS: The best tool to remove the ferrule is a mechanic's pick. If a pick is unavailable, you can use a paper clip or a piece of mechanic's wire with a 90 degree bend about 1/8 inch from the end. If necessary, make the bend first and then trim the wire to length after bending.



SCAN TO WATCH

for a video on more frequently asked questions & tips for HiJackers Air Shocks

O-RING REMOVAL: Apply a prying force to the ferrule to pop it out first. Then use the small wire to remove both o-rings

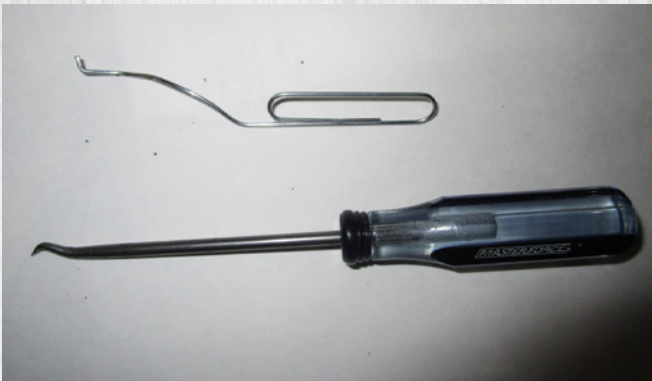

INSPECT & REPLACE:

1. Check to make sure there are no pieces of debris inside the fitting.
2. Install the new air kit tightening the air fitting by hand.
3. Check for leaks with soapy water.

